




- 3MP Sony Starlight Sensor
- 180° Panoramic View
- PIR Sensor
- Day/Night view with built-in IR
- Connect to the existing chime, no extra wire needed
- Remote Live View & Playback via LTS Connect Mobile APP
- Answer, see missed call via LTS Connect Mobile APP
- Connect/record to Platinum NVR & DVR as an IP camera
- MicroSD card slot for local storage 128GB
- Power Kit and 3 Face Plate Included
- Enhanced 2.4GHz & 5GHz Dual-band Wi-Fi

Basics

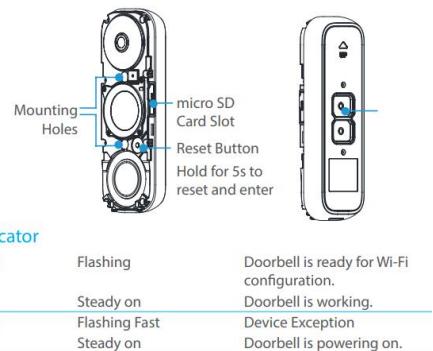

Quick Installation Guide: http://www.ltsecurityinc.com/amfilerating/file/download/file_id/2520/

Connect to the WIFI Network


1. Download the Mobile App: LTS-Connect
2. Login to the account. If you don't have it, please register and login first.
3. Make sure in front of the doorbell or within 3ft distance range.
4. Check your WIFI signal strength from the smart phone.
Please make sure your location WIFI signal is strong.
5. Go to the LTS-Connect main page.
6. On the top right, tap [+] and choose **Scan QR Code**



7. Scan the QR from the front plate sticker or from the QR card.
8. Found the Device and **Next**
9. **RESET the WIFI DOORBELL (Default)**

Press and hold the Reset key for 5 secs, wait a moment after the voice prompt. And final, the indicator flashes **blue** light rapidly.

10. Note. Make sure you got the clear WIFI signal, click **OK**
11. Enter the correct WIFI network name and WIFI Password. Click **Next**
12. Click Connect to a Network when you are ready.
13. Your smart phone will disconnect from the current WIFI network, directly connect to the Doorbell and program the WIFI network.
14. After for a while, the doorbell will Reboot once. It will turns to Red light and finally stay on a **solid blue light**.
15. Adding Completed. **Next**
16. Click **Save**. (The WIFI Configuration is completed)

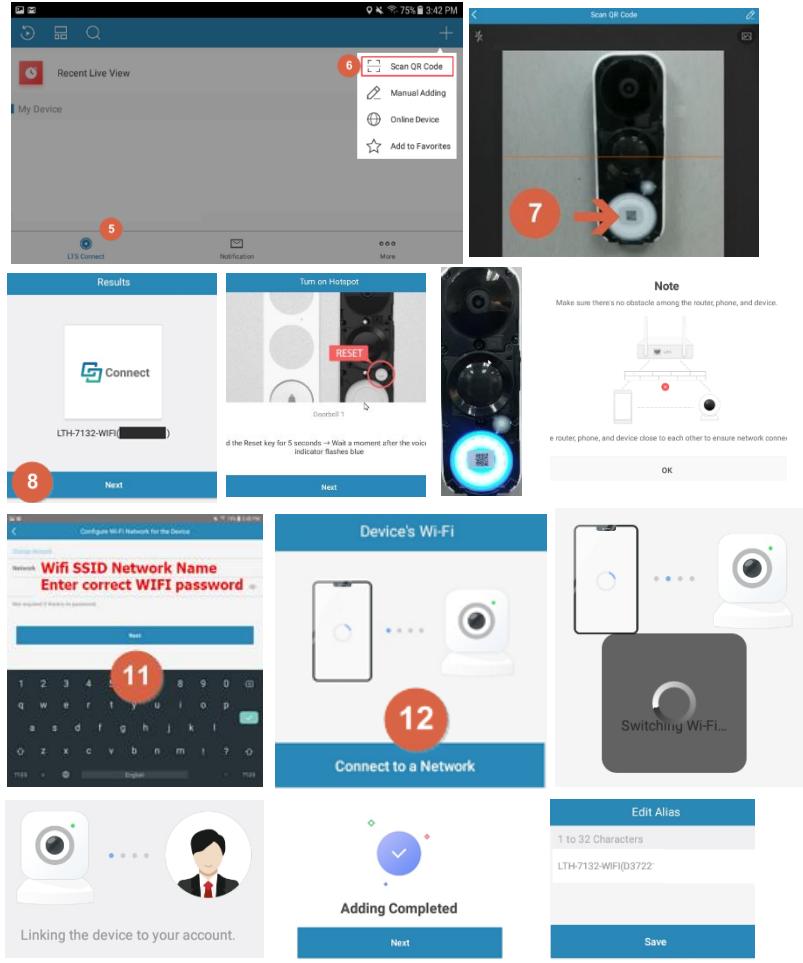


Rest of the wizard setting is simple.

Enable Audio.

Select a Chime type.

And, the last section. **Alarm Area**

You may disable some areas to increase the PIR detection accuracy.

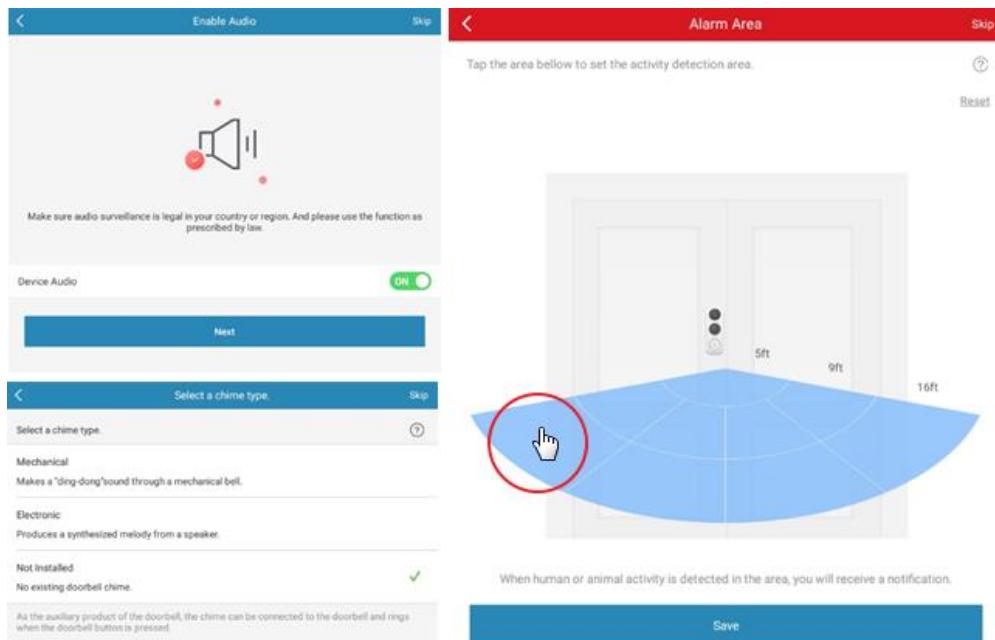FAQ:

Q: What is the Mobile App Name?

A: LTS-Connect

Q: I try to add the Doorbell Cam to the LTS NVR. What is the password?

A: The password is the Verification Code from the sticker.

Q: Is there a Motion Detection area setting adjustment?

A: The camera is using the PIR detection zone setting to trigger the recording. It is not using the motion detection, therefore there is no motion detection setting support.

Q: Does this doorbell camera support the Sub-Stream?

A: Sorry, no.

Q: Is there a Web Login page?

A: For the security purpose, it is not supporting the Web Login.

Q: Can I turn off the blue indicator light?

A: Yes, you can. Go to the Setting and turn off from there.

Q: Is there Wifi Password Length limits?

A: Max length for wifi password is 32 characters, anything over that and the doorbell will fail to connect.

Q: Any suggest for the power Supply?

A: Recommended power for the doorbell is 24VAC. The White Power Kit that comes with the doorbell is required to be installer for the doorbell to work with a chime. If not using a chime, make sure that the fuse that comes with the doorbell is installed.

