



NVMS7000 App Quick Guide

Recently, we just updated the mobile app NVMS7000 for Android and iPhone. Here is some Basic setup information to help your customer for first-time use.

You can download NVMS7000 from

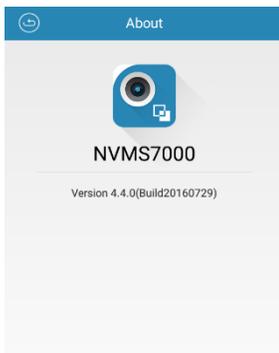

Android [< Link >](#)
 iPhone [< Link >](#)

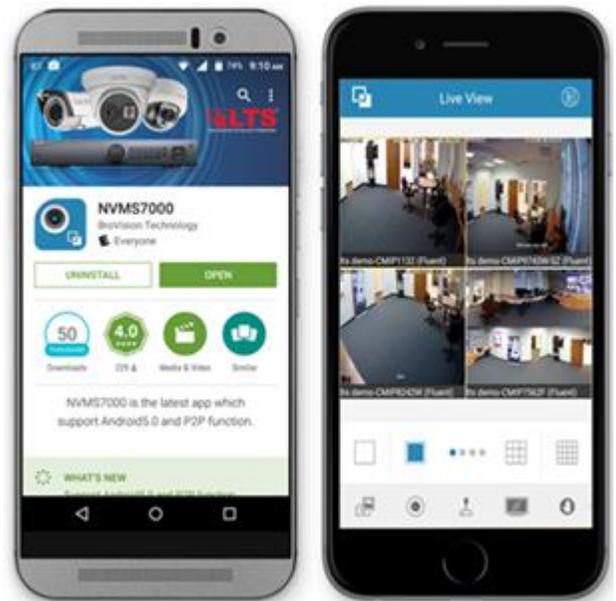

Let's Run NVMS7000.



For the first time run,
 Select the Region first.



The Region will affect the Live View,
 Playback, Alarm Notification based on the location.

V4.4.0 Update Features

1. Support device backup and restore in batch by QR code.
2. Support Fisheye Expansion Features
3. Support up to 16X playback speed.
4. Support Swipe Pages for more than 16CH Screen.
5. Support remote controller to operate the device menu.
6. Support remote configuration for configuring recording schedule, device time, password, and other settings.

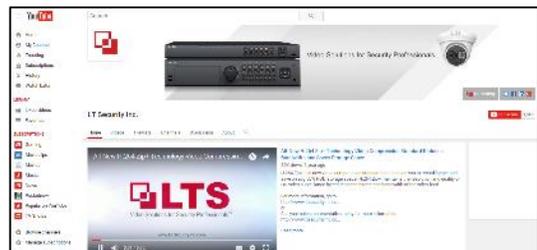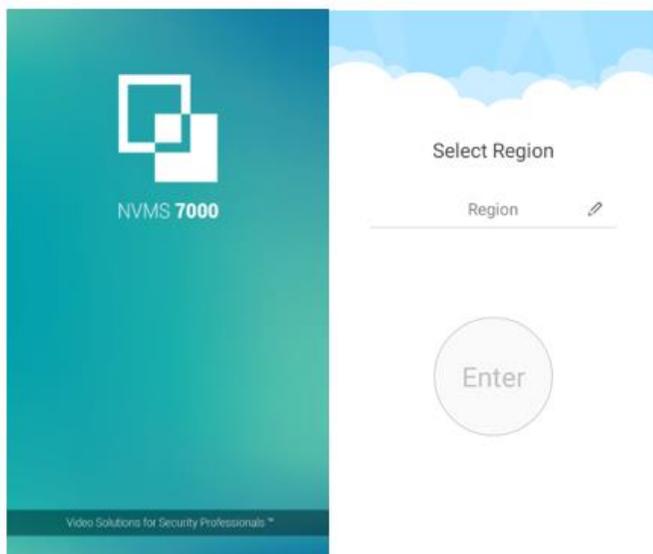

Watch Video Tutorial from the YouTube



Tutorial: How to Setup your NVMS7000 for Apple iPhone...
 1,099 views · 6 months ago



Tutorial: How to Setup your NVMS7000 for Android Device...
 1,067 views · 6 months ago



Live View -- How to View my DVR/NVR/IP Camera?

1. click  (Menu) on upper left corner.

Click **Devices** from the Left Menu

2. Select Location from the List.

3. Press Start Live View 

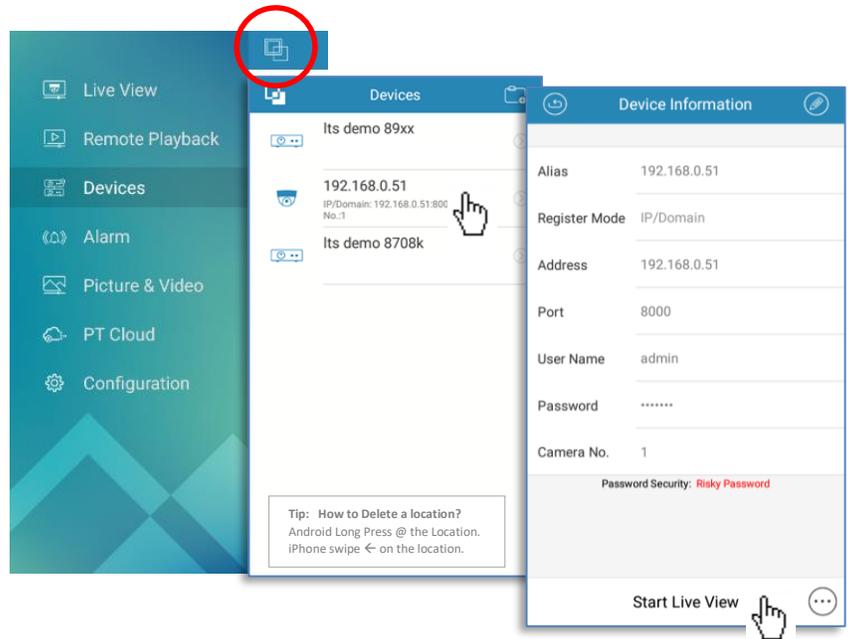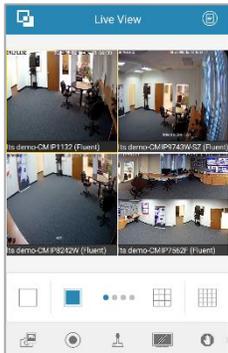

[\(For the first time Use, please see Next Page. How to add Location in the Devices\)](#)

Live View

← Camera List / Favorites

Capture Picture

Record Current Window

PTZ Control

Image Quality

Play / Stop

Audio Control

Two-way audio

Alarm output control

Digital Zoom

Fisheye Expansion

SWIPE LEFT OR RIGHT

DEVICES -- How to Add Location into the Device?

1. click  (Menu) in the upper left corner
Click Devices **on the Left Menu.**

2. Go Upper Right corner,
click  & click **Manual Adding**

3. Then, enter the IP information

Alias: Location nickname
Register Mode: **IP/Domain**
Address: **IP# or dvrlists.com**
Port: **8000**
User: **admin** (DVR username)
Password: **•••••** (DVR password)

Camera No. 0 (Will change it after saved)

4. Click Upper Right corner to Save it.

5. Then, click the **Start Live View** to View.


Other Useful Settings [\(Page 7,8\)](#)

Scan QR Code – Import

Generate QR Code – Export

Online Device – Search IP Utility

Wifi Configuration – Program Wifi

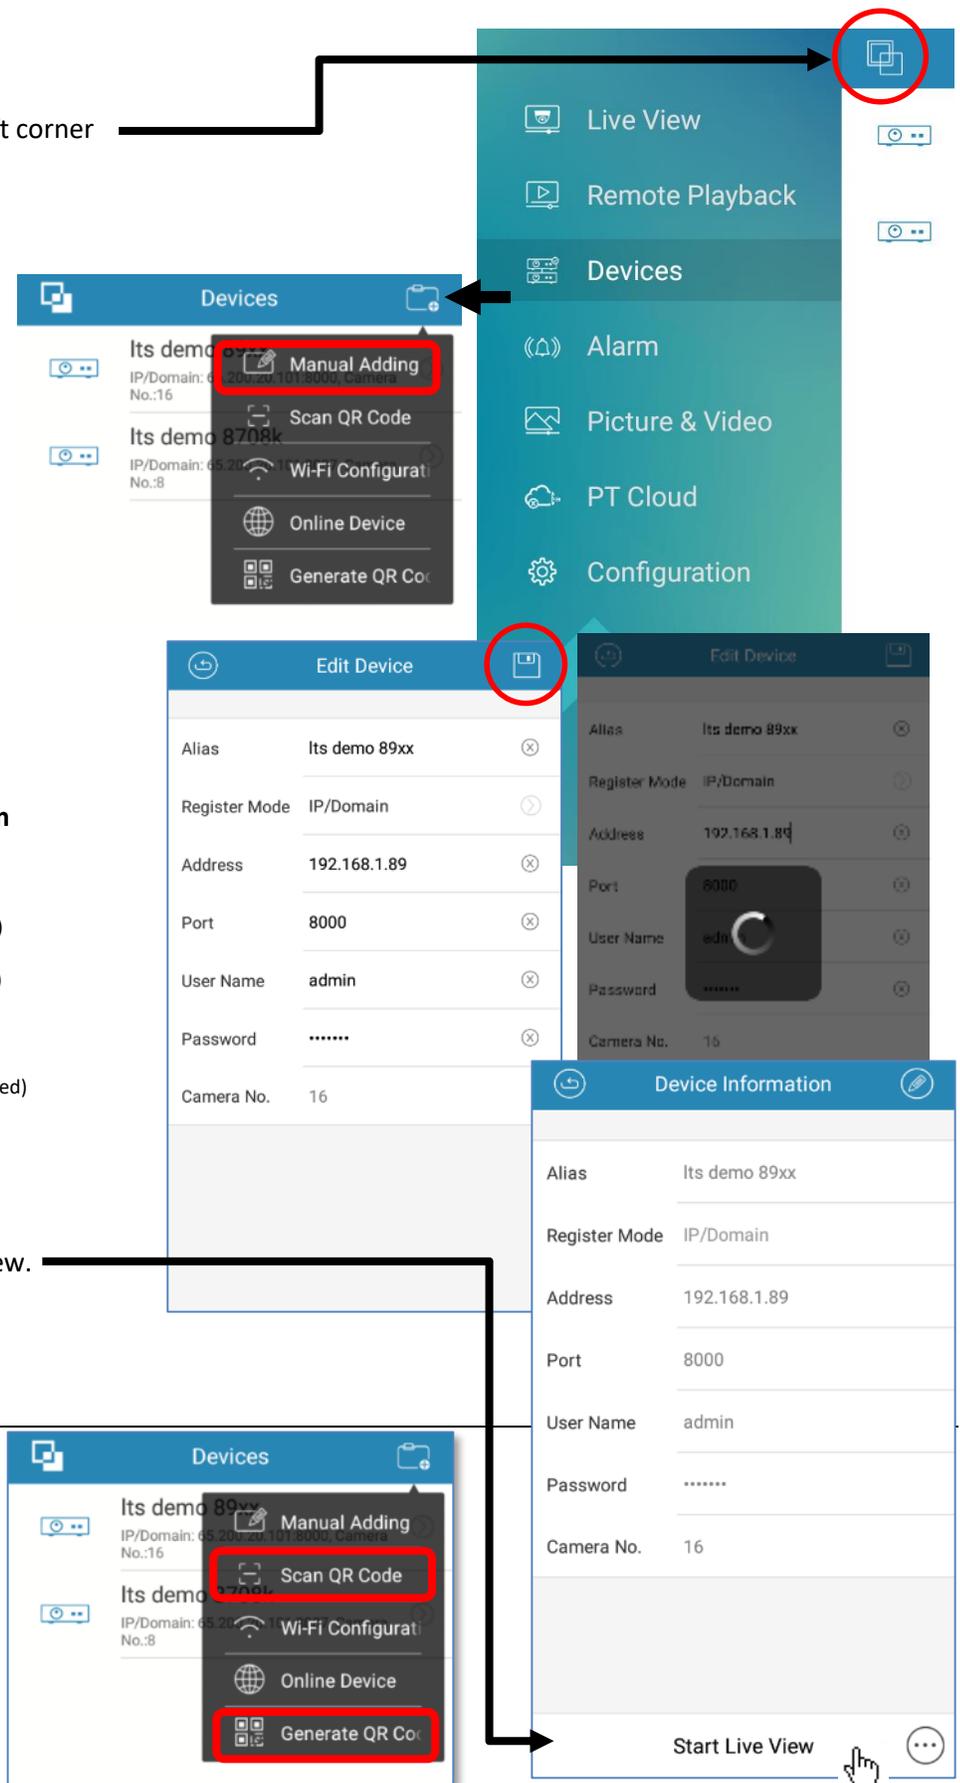


Camera List / Favorites

1. Press  icon go to Camera List




2. Select or de-Select the camera from the List

3. Click  save currently selected camera to a Favorite Group. (i.e.  1-16)



4. When finished, click Start Live View to see the video.

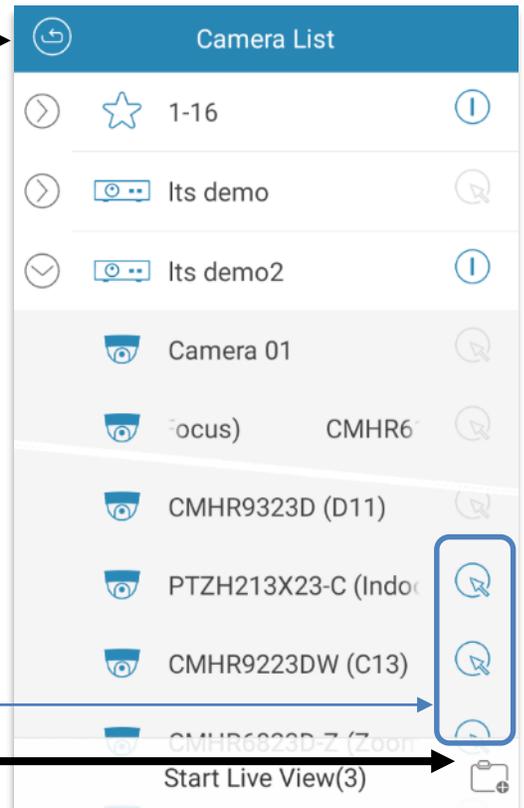



1. To create another Favorite Group. For example, 17-32

2. Uncheck All the camera first

3. Then, Select the camera from the List. CH17 to CH32, just like 1-16.

4. Click  save current camera to a Favorite Group as  17-32



5. When finished, click Start Live View to view

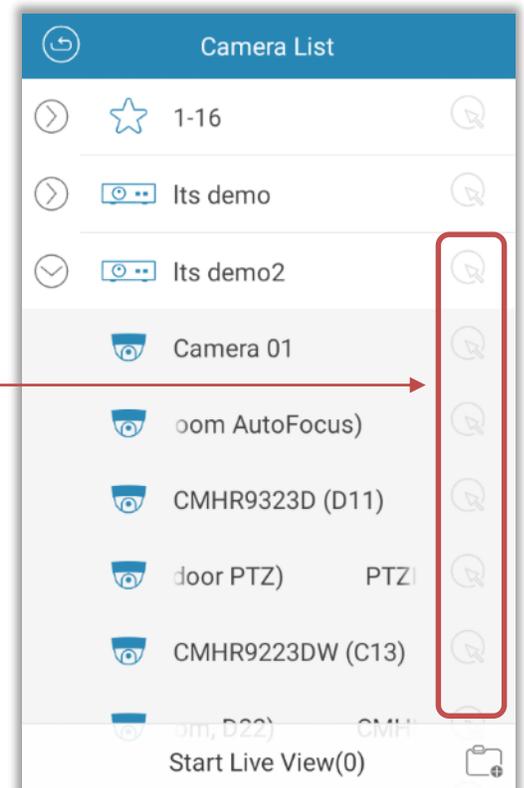

Tips 1:
You can save multiple IP Camera to become as one favorite group.

Tips 2:
For slow internet speed connection, you can use Favorite to reduce camera connections.


Remote Playback

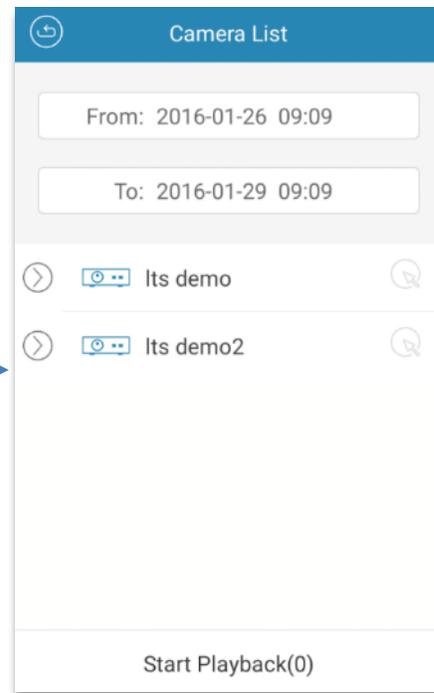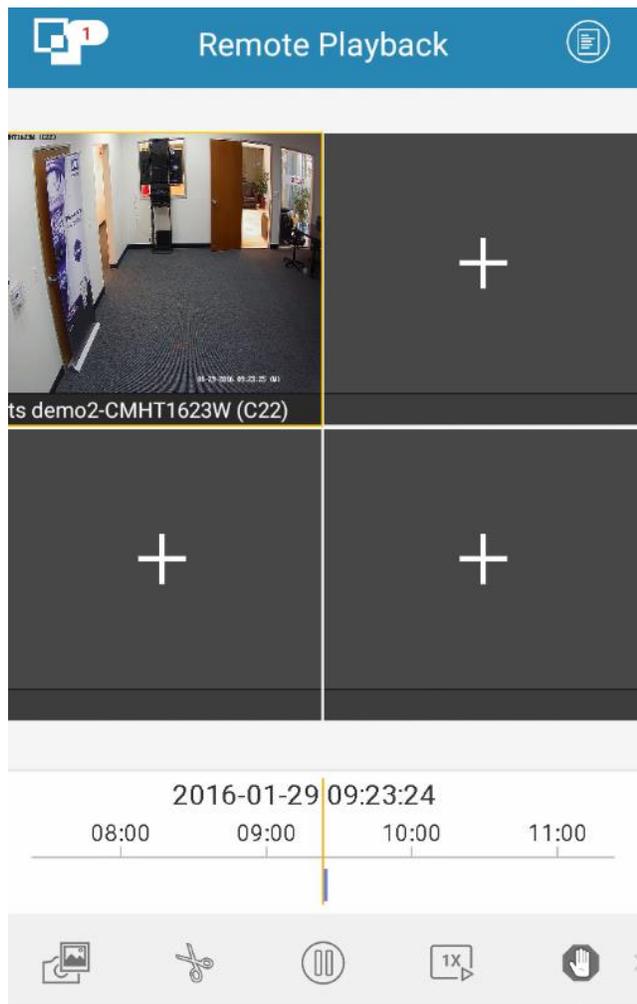

- Save Snapshot
- Recap Video
(drag time still stop record)
- Pause
- Speed Control
- Play / Stop



- Speaker
- Digital Zoom

Note:
 Recap video button is designed for a short moment backup.
 Drag the timeline will cause record stop.
 If you try to backup long period time, please use PC to do the backup.
 Playback Speed Control based on your network speed. Local network may able reach up to 16x speed.

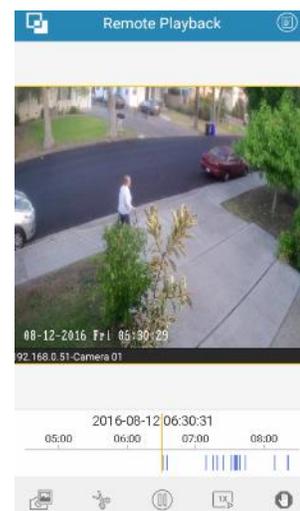

Live View -- PTZ Control

1. Enable PTZ button
2. Swipe screen to move UP/DN/LF/RT
3. Click Preset Button to Set or Call Preset.

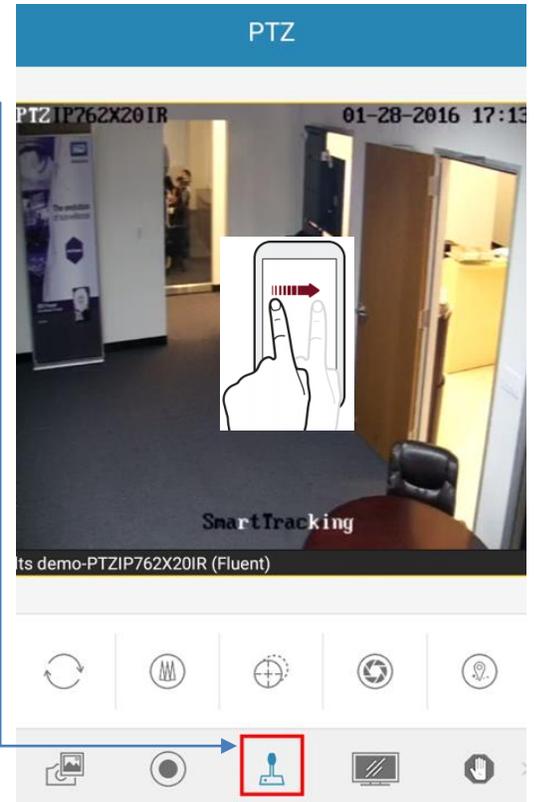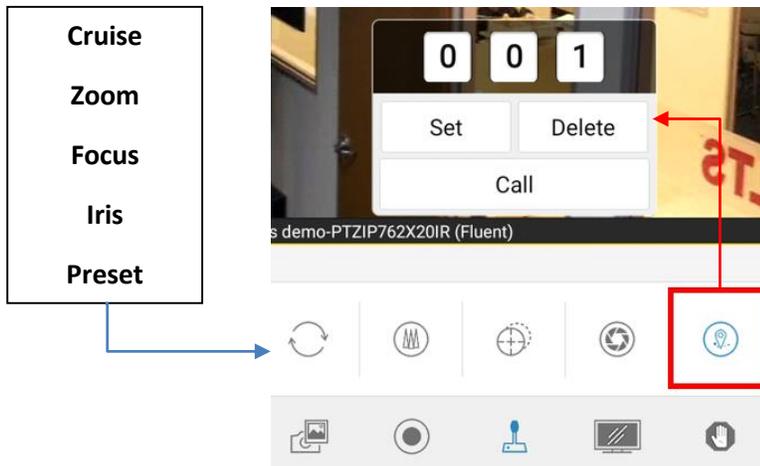

Live View - Change Image Quality

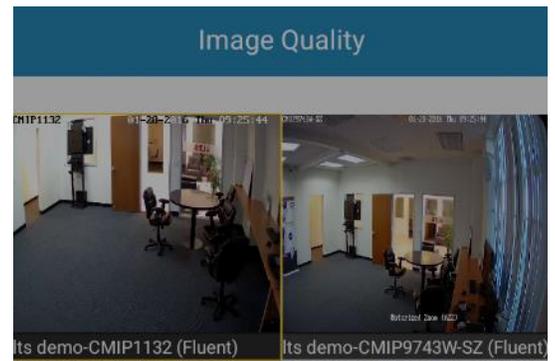
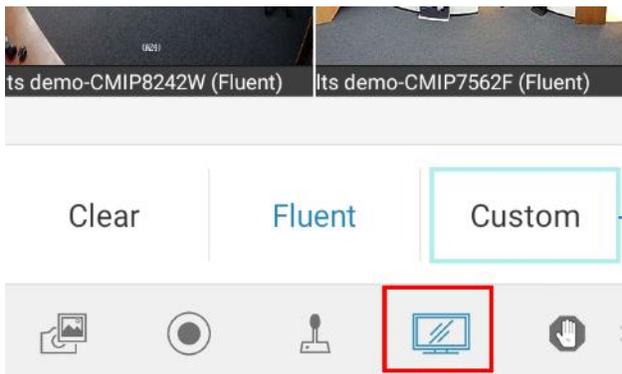


Image Quality

There are two defined image quality type provided, including Clear and Fluent. (Prefer to Fluent)

IMPORTANT The Custom Button for Expert Use Only. The Custom control is related to the remote configuration for customize the image quality. If you adjust the setting that will also effect to your local recording quality, too.


Custom

Stream Type	Sub Stream
Resolution	4CIF(704*576)
Frame Rate	10
Bitrate	512K


Confirm

Live View – Fisheye Expansion

Fisheye Expansion feature only supports with LTS Fisheye Camera. (More descriptions in the Configuration -> Help)

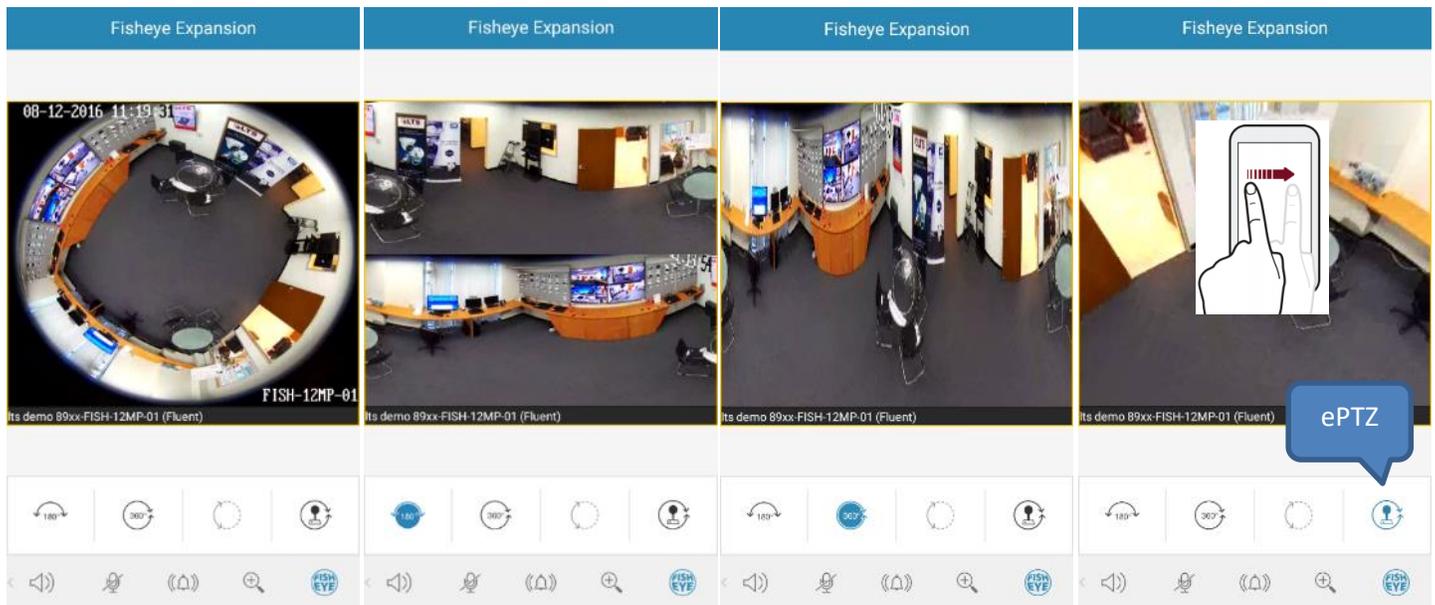


Picture & Video

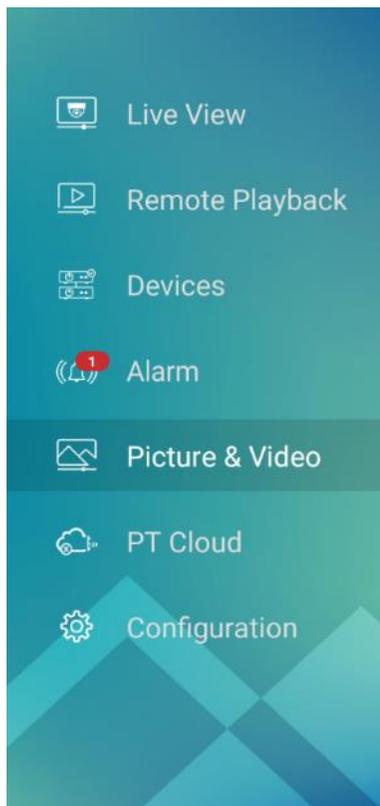

In Picture and Video Management interface, you can view and manage the local video file and pictures that you manually record (clip) and capture in Live view and Remote Playback interface. The pictures and video files are stored in the NVMS7000 directory of the SD card. You can also share the pictures and video files to other available applications.


Share or Delete the video, select Pencil icon for more actions.

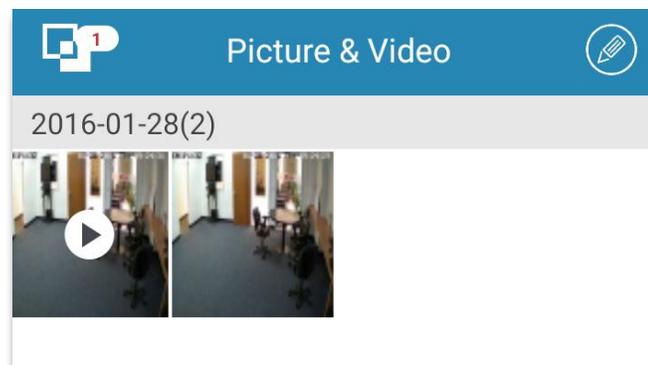

Devices -- Generate QR Code (Same as Backup Device Lists)

Generate QR Code is a useful tool, and you can Backup Current or Multiple Locations into a QR Code.

1. Click Logo  (Menu) -> **Devices**
2. Select **Generate QR Code** from the menu.
3. Select Location, and click **Generate QR Code**

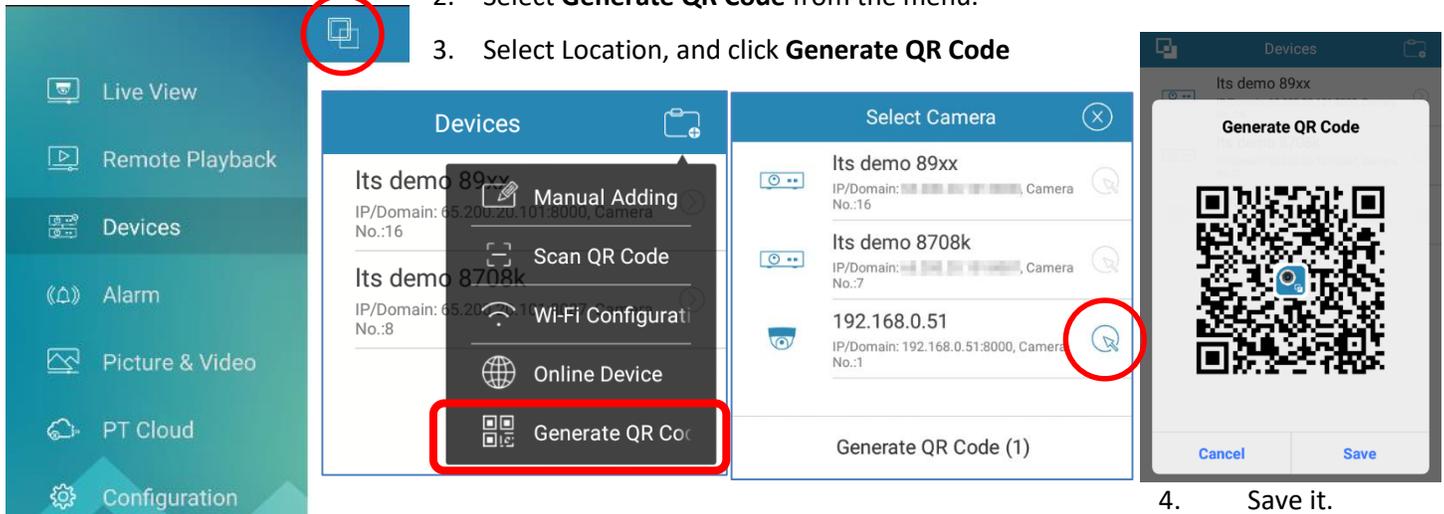


4. Save it.

Devices -- Scan QR Code (Same as Import Device Lists)

Scan QR Code is a useful tool, and you can Import QR code location from your cellphone, or scan it from your PC.

1. Click Logo  (Menu) -> **Devices**
2. Click **Scan QR Code** to import location(s).

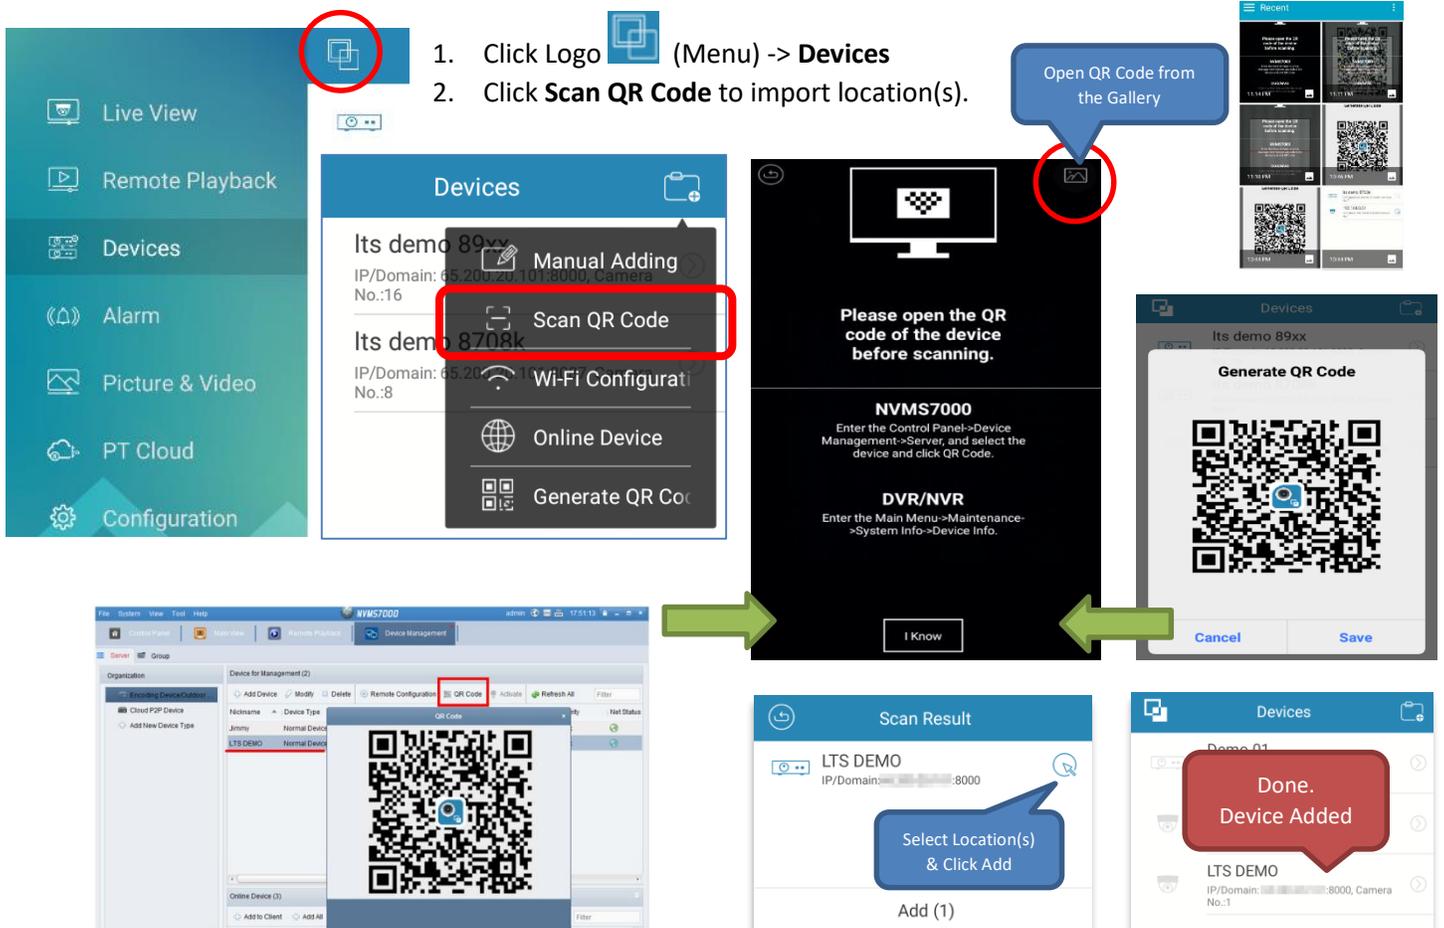

Open QR Code from the Gallery

Please open the QR code of the device before scanning.

NVMS7000
Enter the Control Panel->Device Management->Server, and select the device and click QR Code.

DVR/NVR
Enter the Main Menu->Maintenance->System Info->Device Info.

I Know

Scan Result
LTS DEMO
IP/Domain: :8000
Select Location(s) & Click Add
Add (1)

Done. Device Added

LTS DEMO
IP/Domain: :8000, Camera No.:1

Devices -- Online Device



(Same as IP Portal Utility)

Online Device is a useful tool, and you can search & modify the IP Camera address without using PC.


1. **Connect to Local WIFI first (Same Network)**

2. Click Logo  (Menu) -> Devices






3. Click , select **Online Device**
Then, you found all of the LTS IP devices.

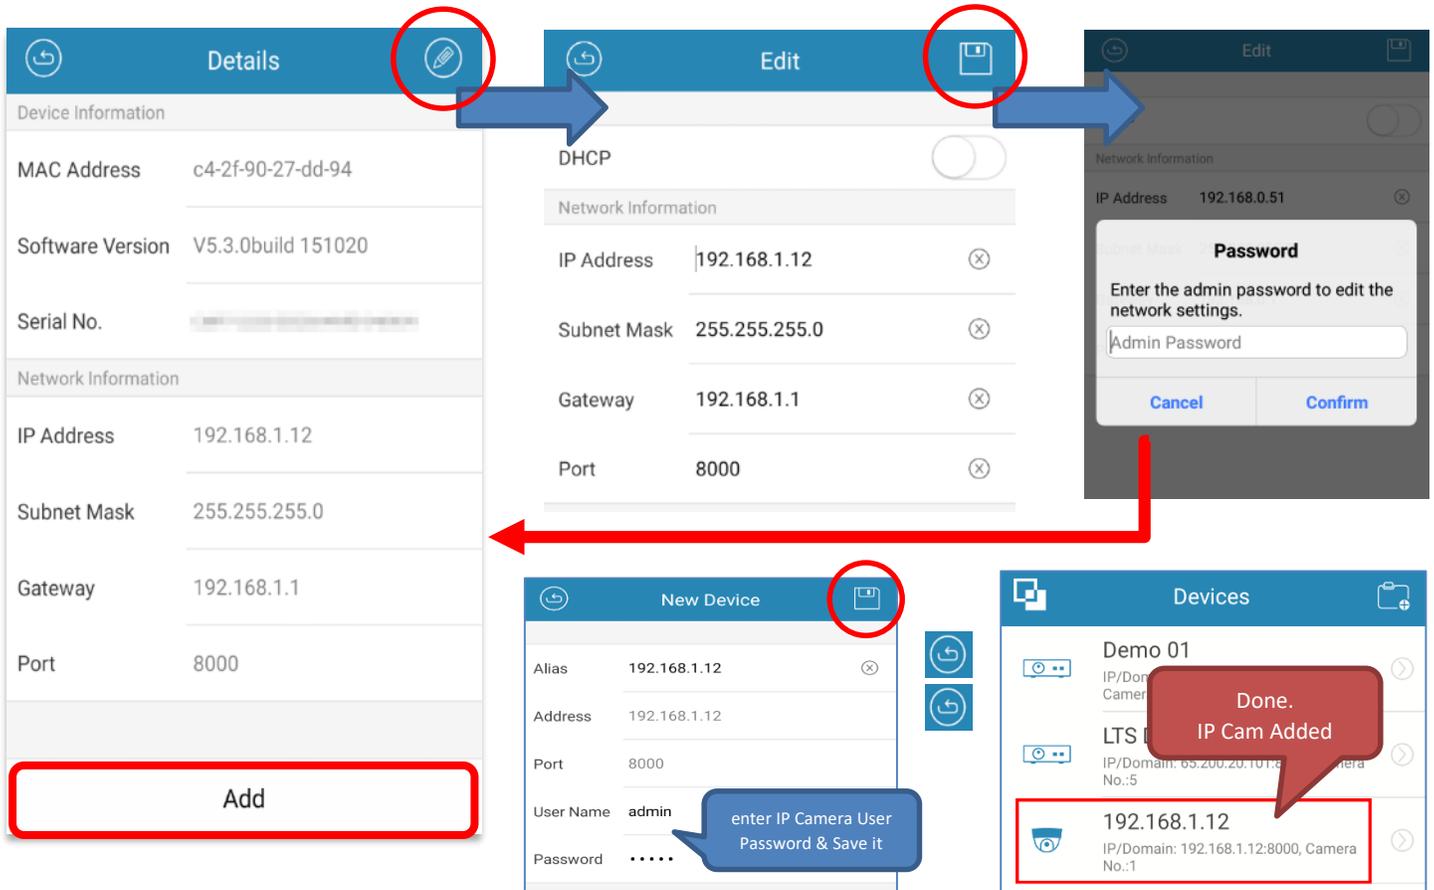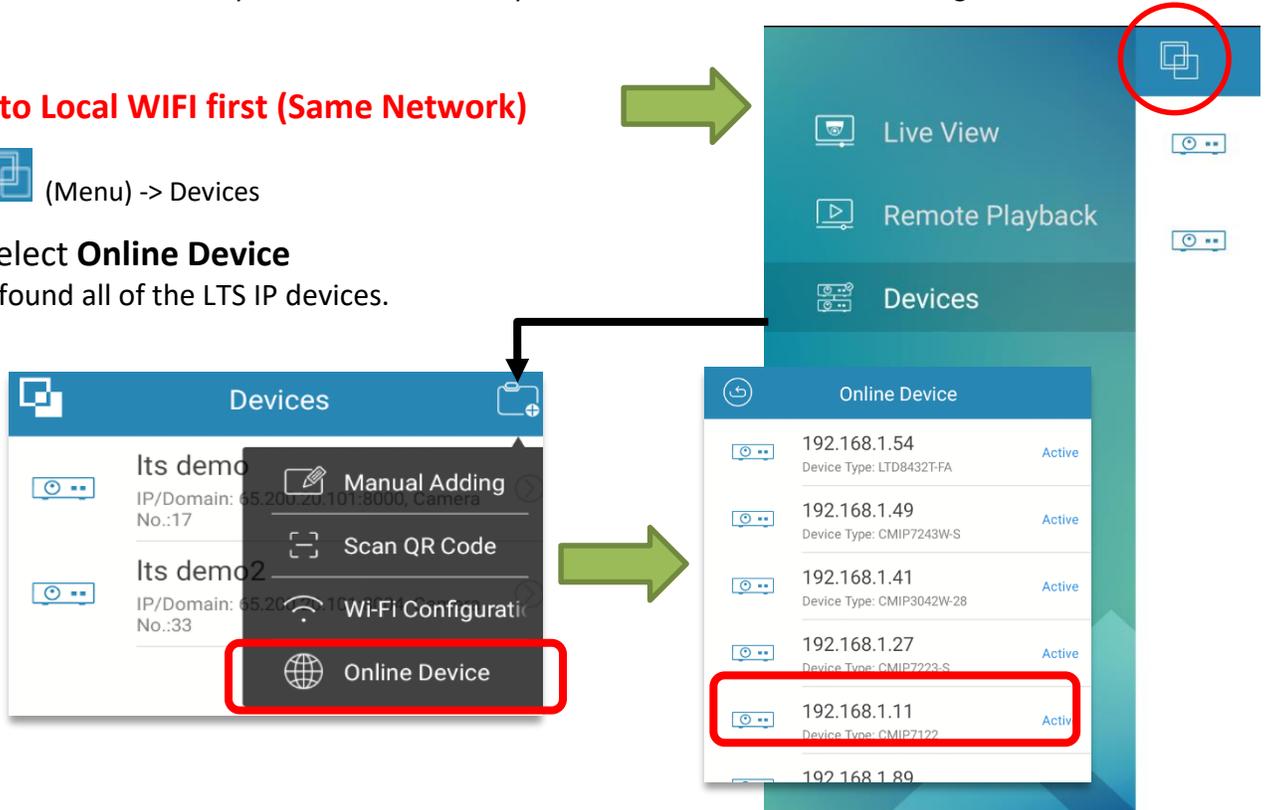

Alarm (Push Notification)

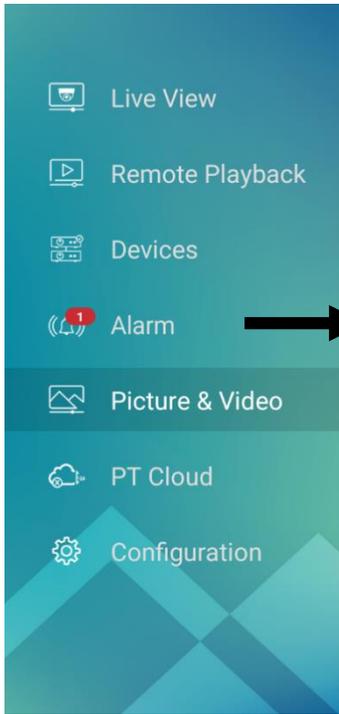

In order to use this feature, your IP Camera/DVR/NVR must enable Motion Detect or VCA function and Notify Surveillance Center must enable.

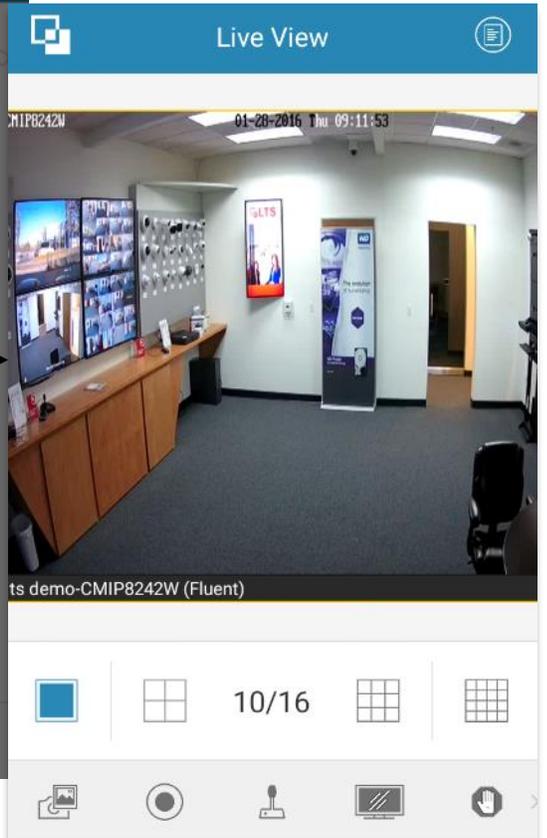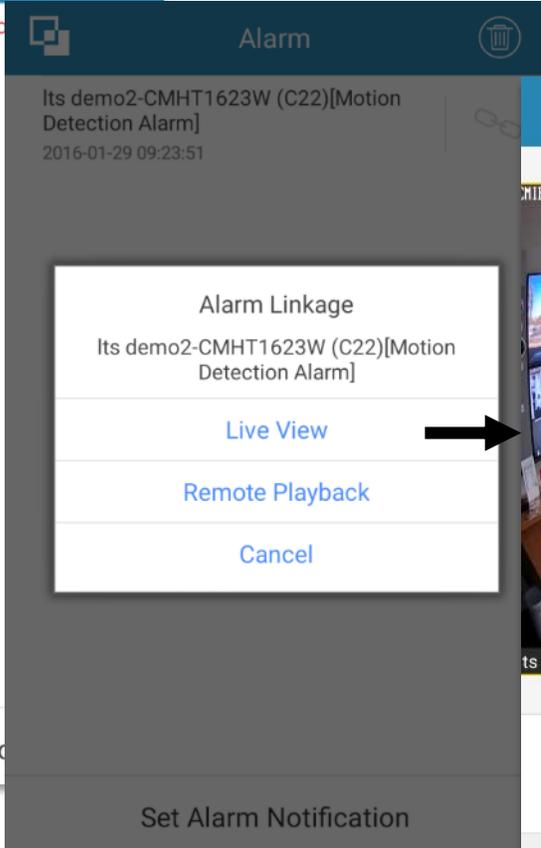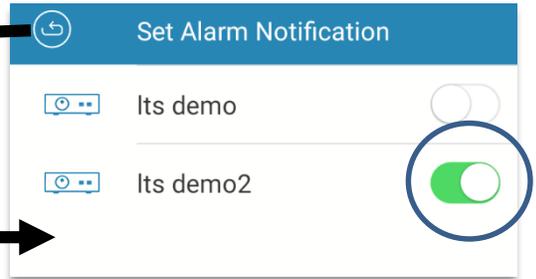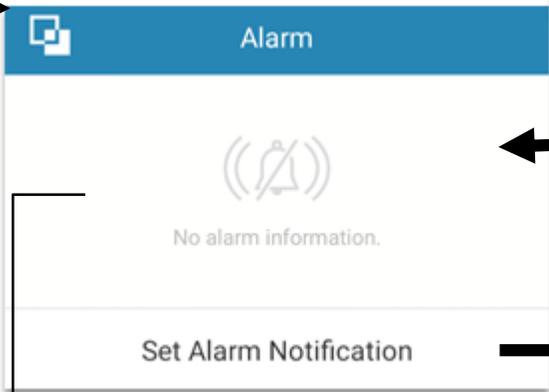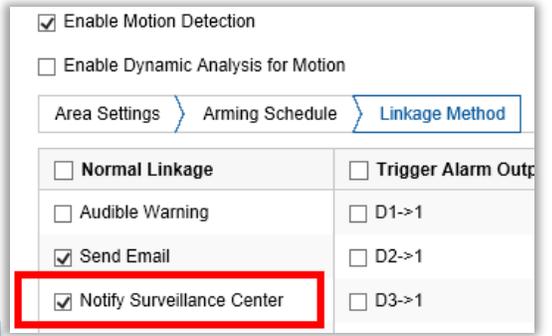

PT Cloud Login How to Login PTCloud thru Mobile?

Go to **Main Menu Button**,
Click **PT Cloud**




1. enter PTCloud User Name & Password
(If you haven't complete PTCloud setup,
please see KB - how to setup PTCloud)

2. Click **Login**


*Remember, Your User Name & Password already setup.
If you don't know, or not setup yet. Please check the KB how to
setup. LTS won't respond your user account and password.

After Login Success, you should see your DVR on the list.


Click on **DVR**, then select **Live View**

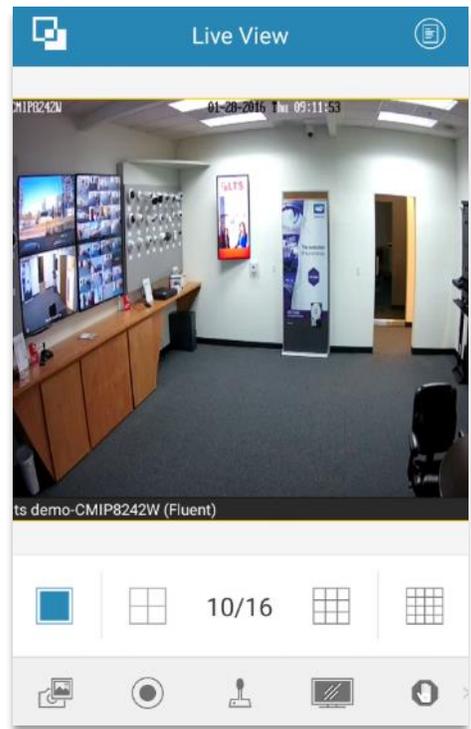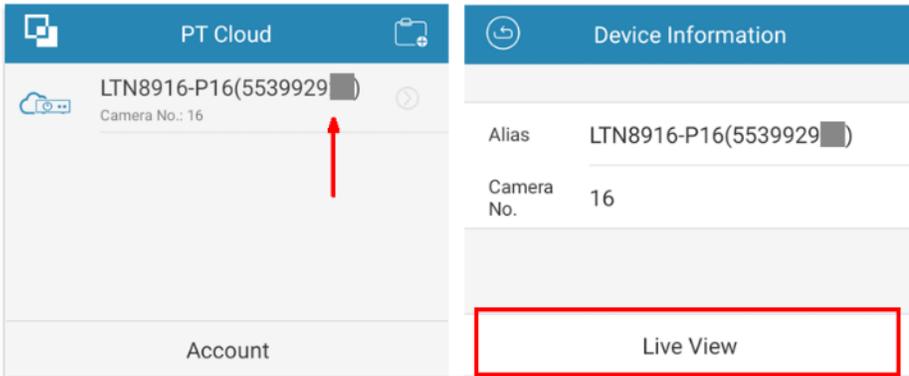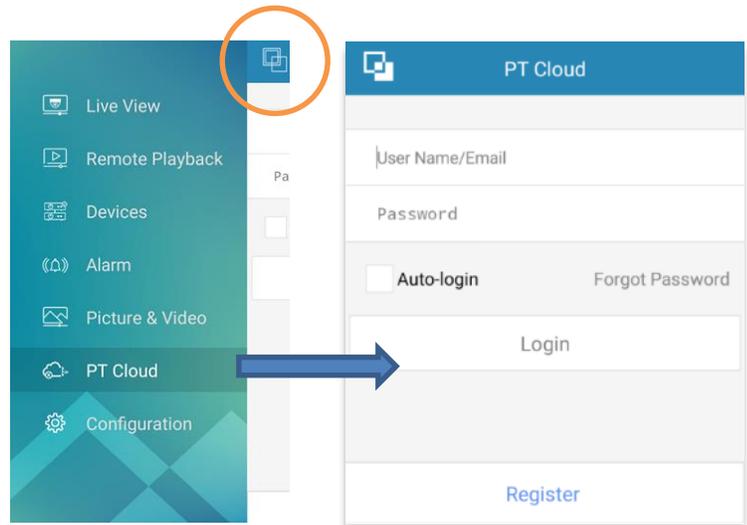

(If you haven't complete PTCloud setup, please see KB - how to setup PTCloud)

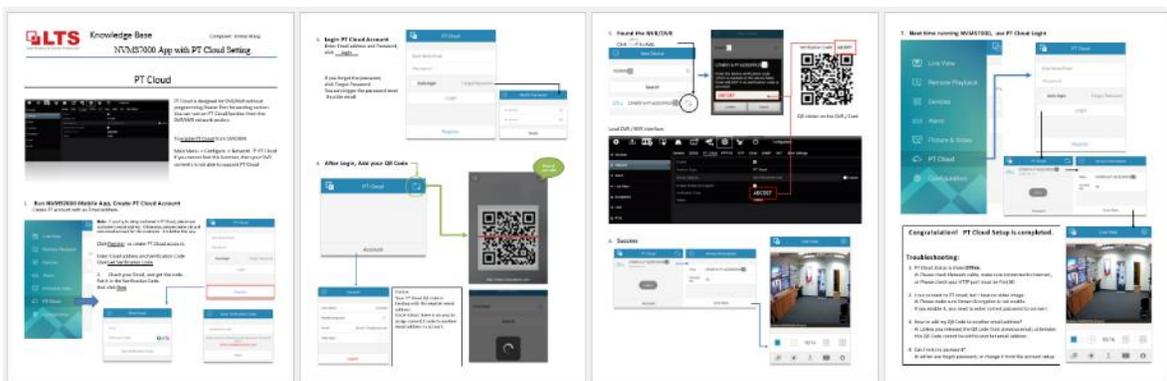

Help / Manual

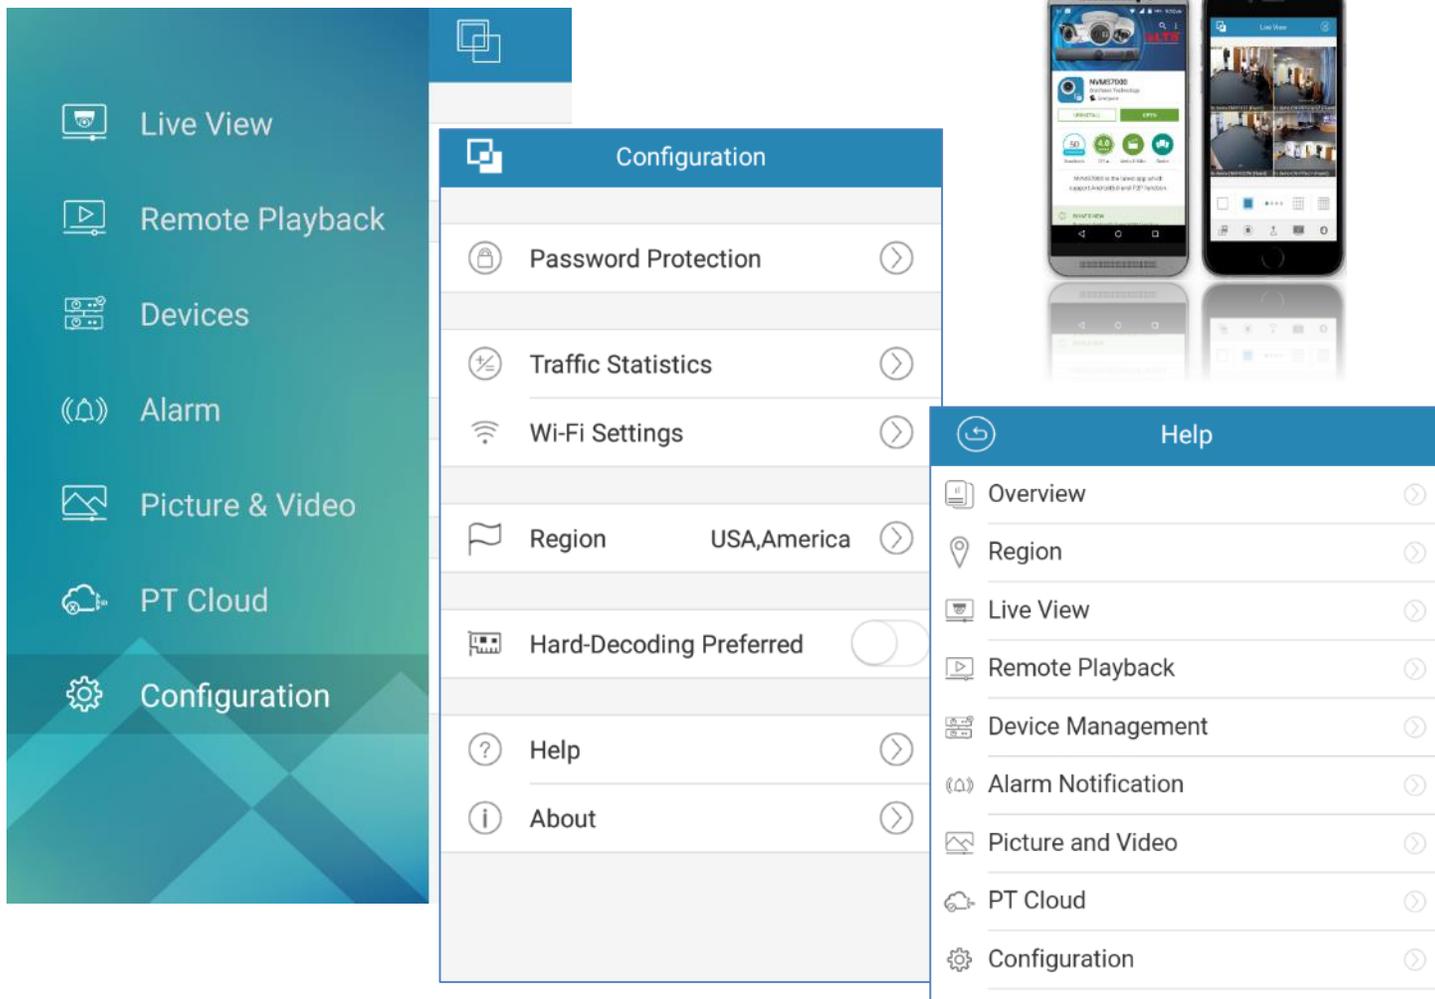

New - Hard-Decoding Preferred (require Android 4.1+, for lower CPU usage while playing live view or playback)
(Note -- Capture, Digital Zoom, Fisheye Expansion and local playback will be disabled)

For more description of user manual,
Go to **Menu -> Configuration -> Help**

Or, check our website for more help



Get Products Faster

The LTS APP
Be the first to know when it arrives at your
iTunes or Google Play store.

Download on the **App Store** GET IT ON **Google play**

IPHONE **ANDROID**