






Browser: Live View (with IE Mode ON)

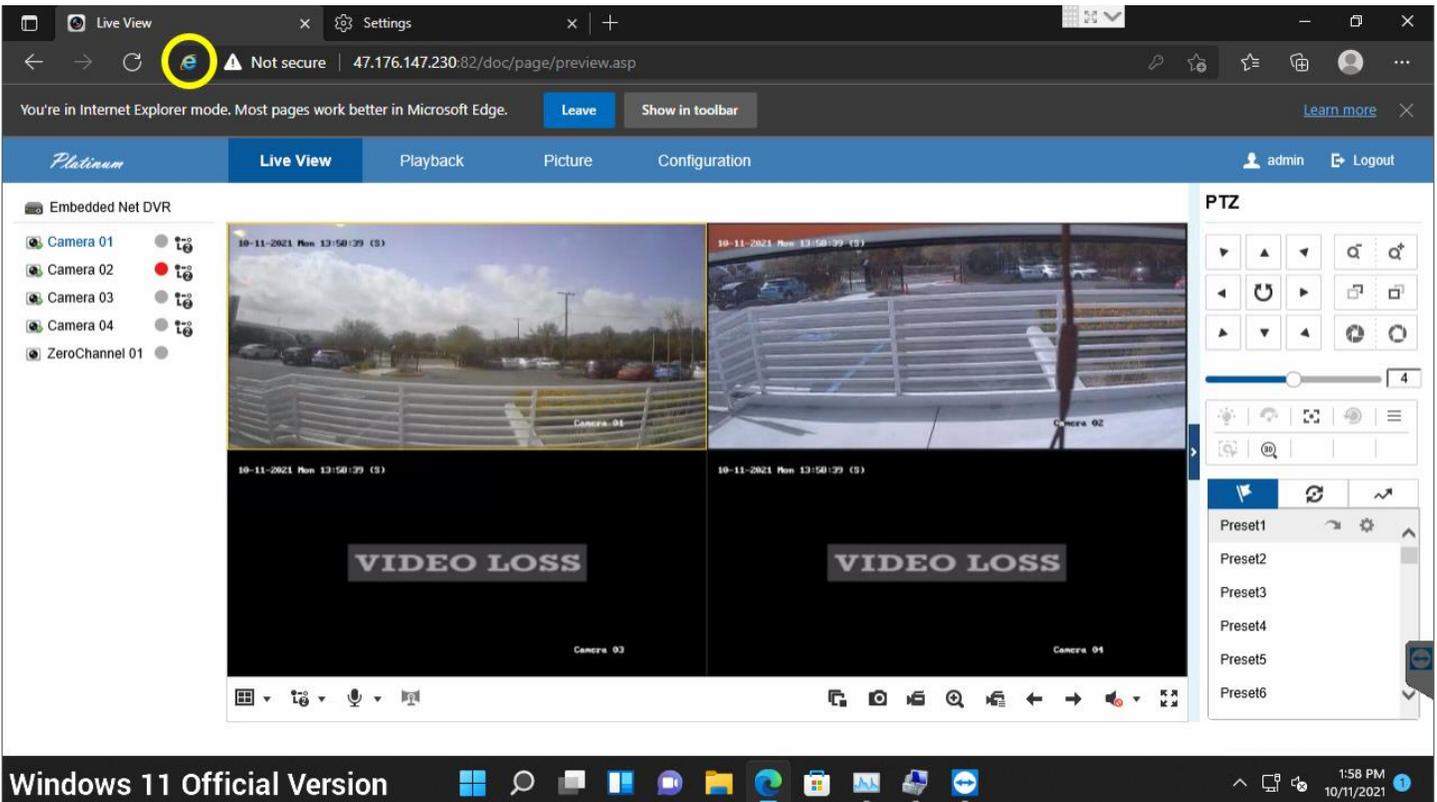


Browser: Playback (with IE Mode ON)


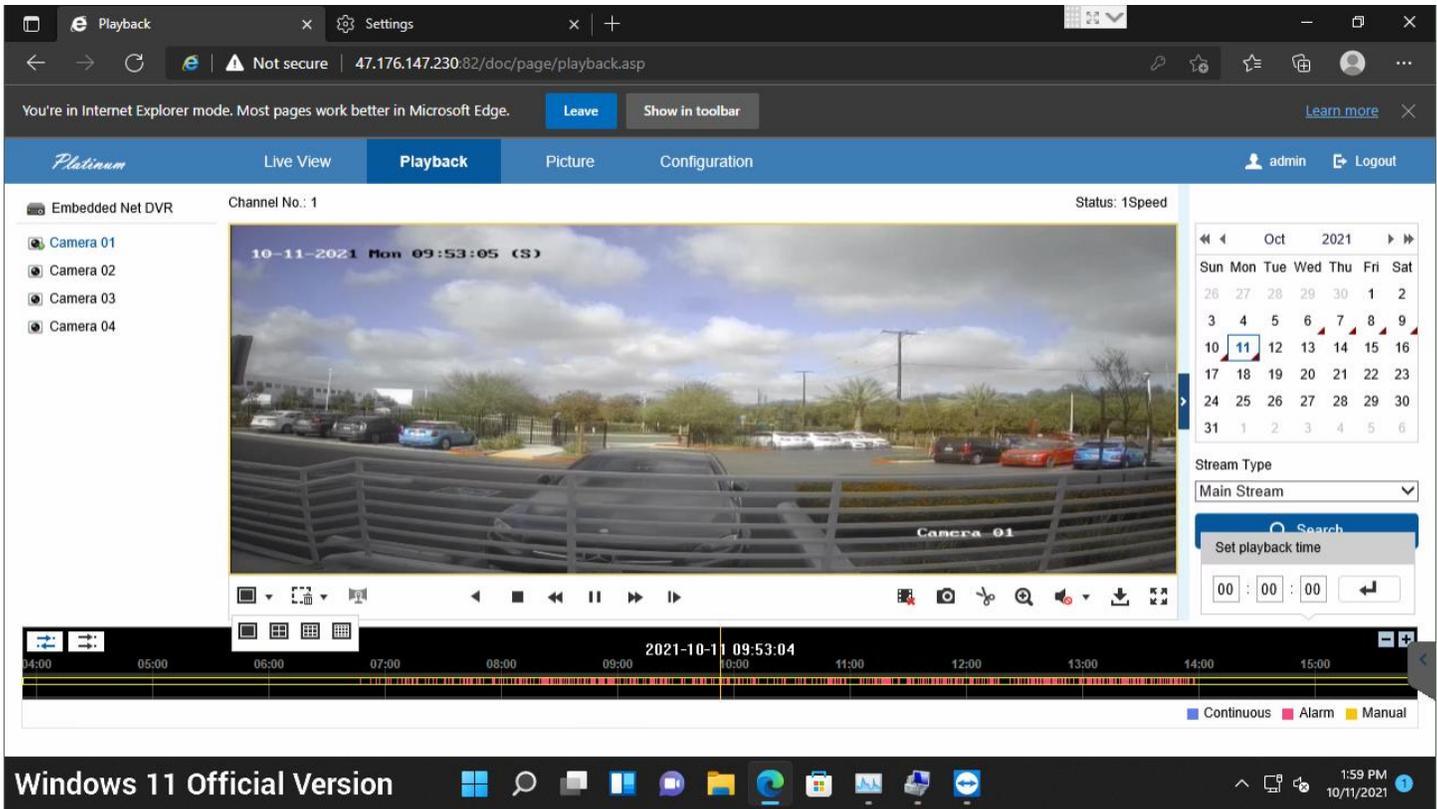


How to enable the Internet Explorer Mode (IE Mode)? The Internet Explorer won't let it run within Win11

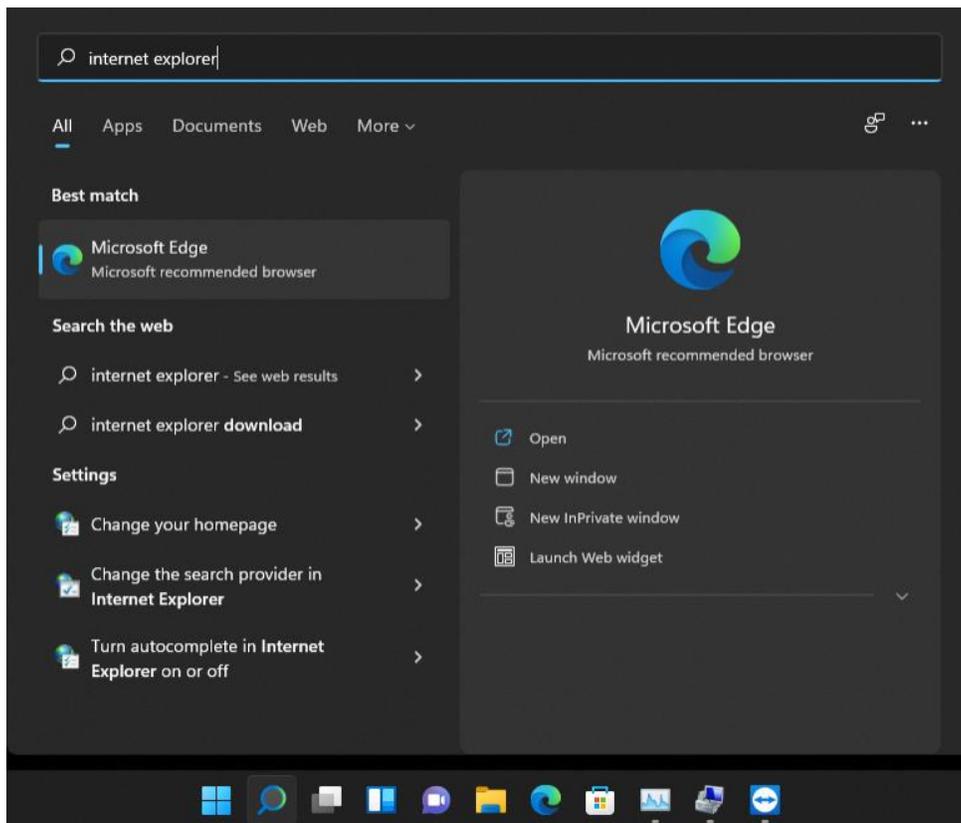


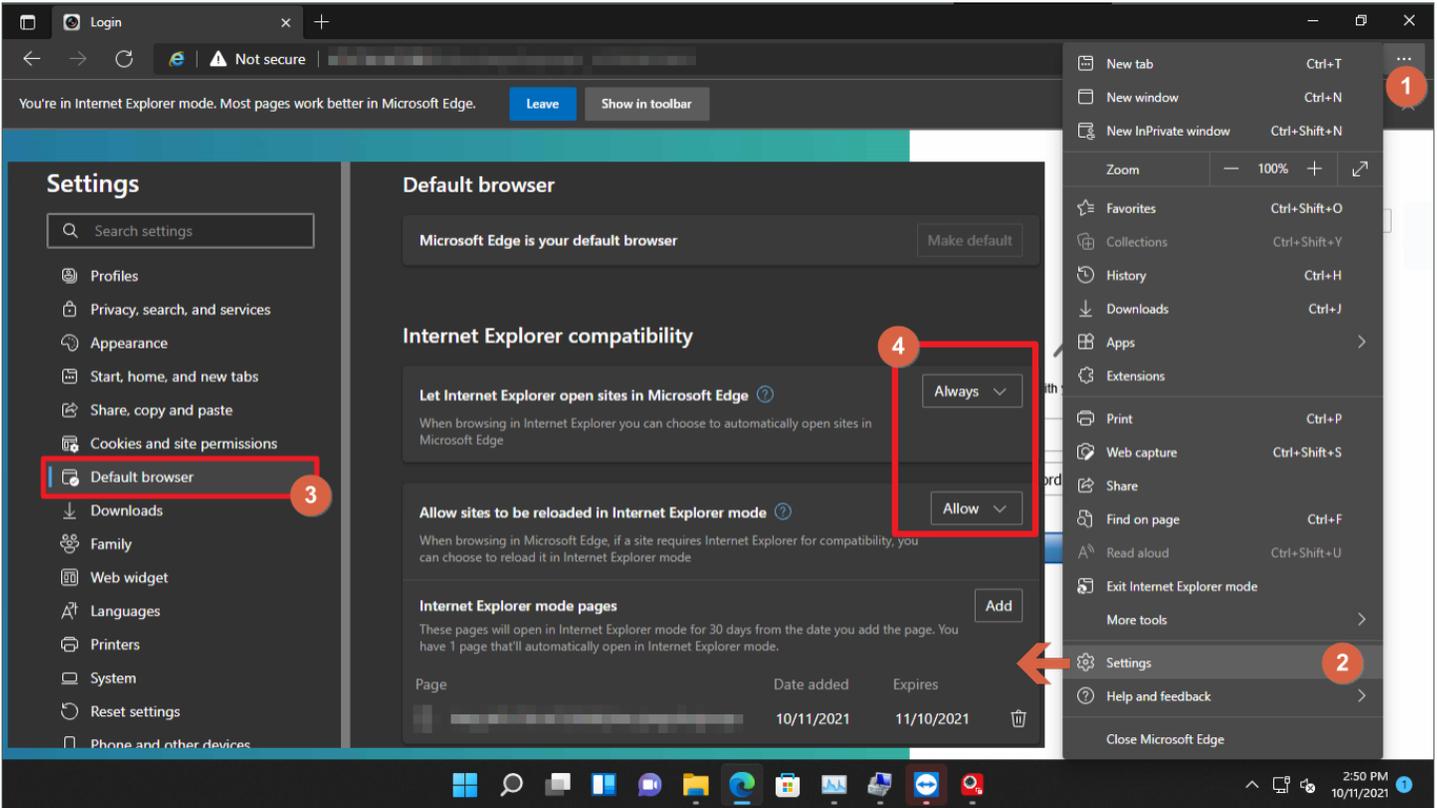

1. Open the Edge Browser, go to the **⋮** menu.
2. Go to **Settings**
3. Find out the **Default Browser** from the left Panel.
4. Turn on Both sections to **Always**.
5. **Restart** the Edge Browser & Re-enter the DVR IP Address.
6. Enable IE Mode. Open the Edge Browser, go to the **⋮** menu, then select **Reload in Internet Explorer mode**.
7. Now, you should see the IE mode logo. (Yellow Circle)

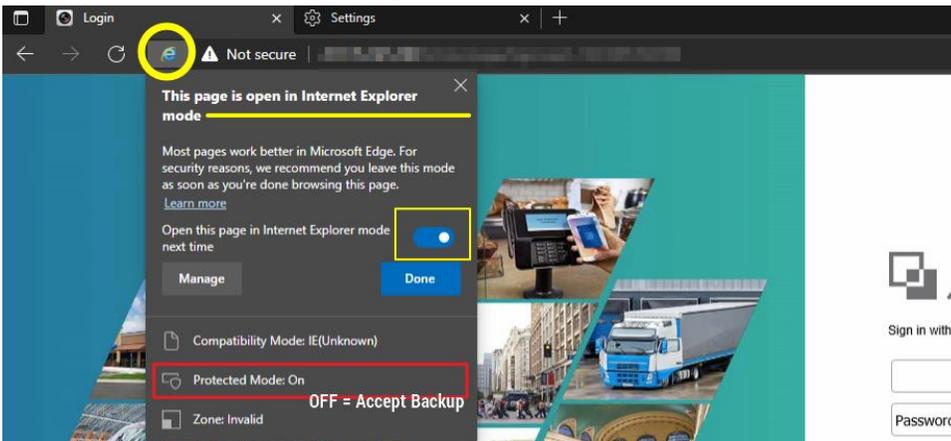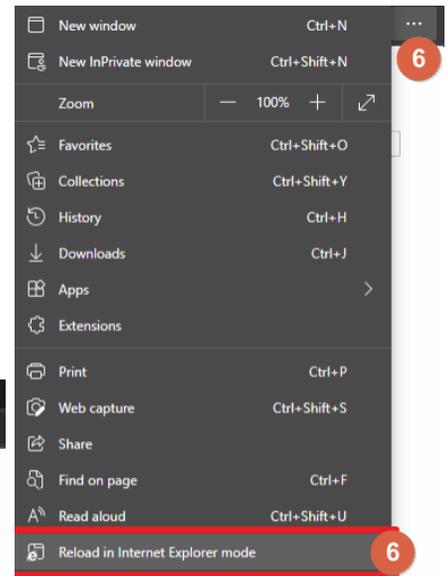


8. If you want to open this page in Internet Explorer mode next time, please turn on the switch.
9. Click Done to exit the prompt.
NOTICE: With the Protected Mode: ON. You probably are not able to save any video files. See how to disable this, please check the Adjust Protect Mode section.
10. Now, you should be able to **download** the plugin, **install** and **Allow** the plug-in like before.

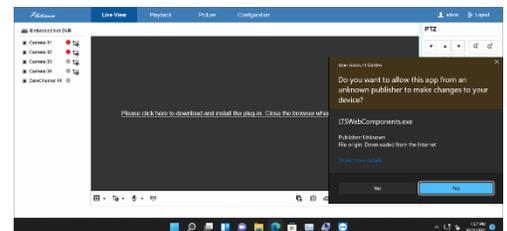

How to Change Protect Mode: OFF


(Add the Site Address to the Trust Site List)

1. Open the Control Panel first. Click the Search icon.
2. Enter the "Control" keyword
3. **Click Control Panel**
4. After the panel is open, change View by: **Large Icons**
5. Find and click **Internet Options**

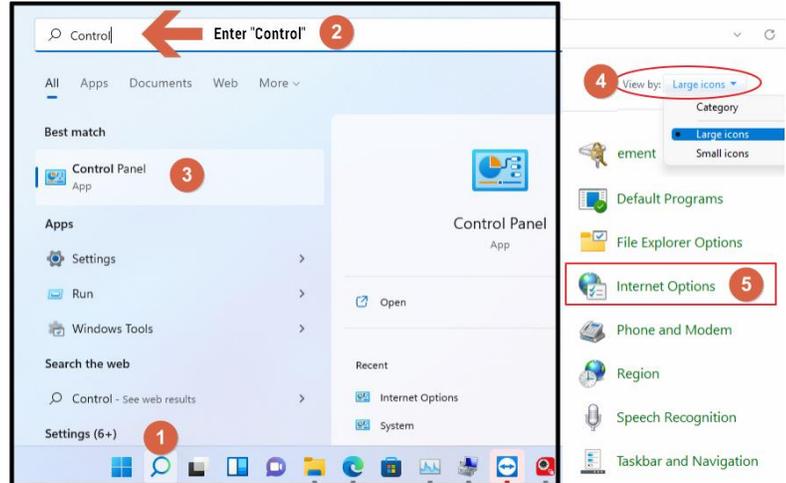


Add the Address to the Trusted sites list.


1. After the Internet Options panel is open, click the **Security** tab (2nd tab) on the top.
2. Select Trusted sites
3. Select the Sites button, the Trusted site's panel will open.
4. **Uncheck** Require https:
5. **Enter the DVR IP Address**
6. Click **Add**
7. Click Close
8. Now, Open the Edge Browser and enter the IP Address. You can click the IE Mode icon to check the protected mode status

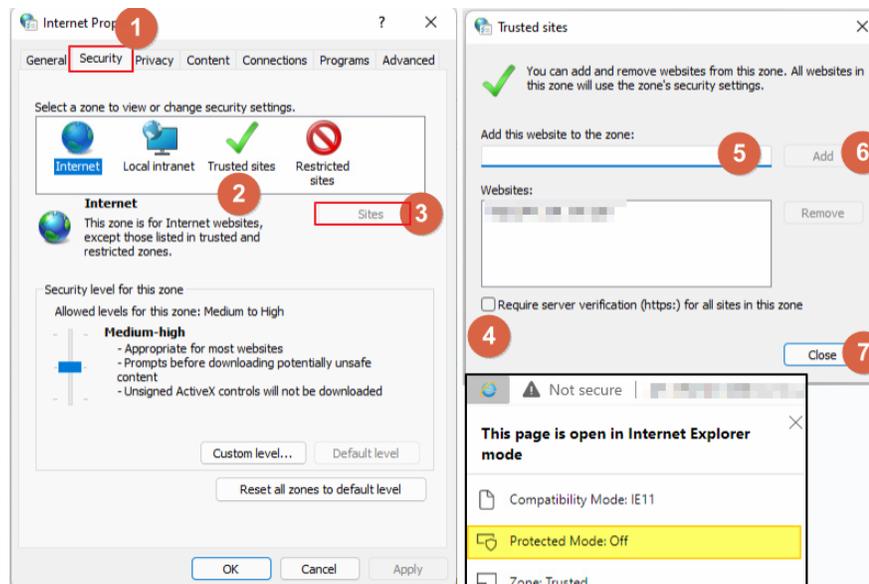


NVMSv3: Live View

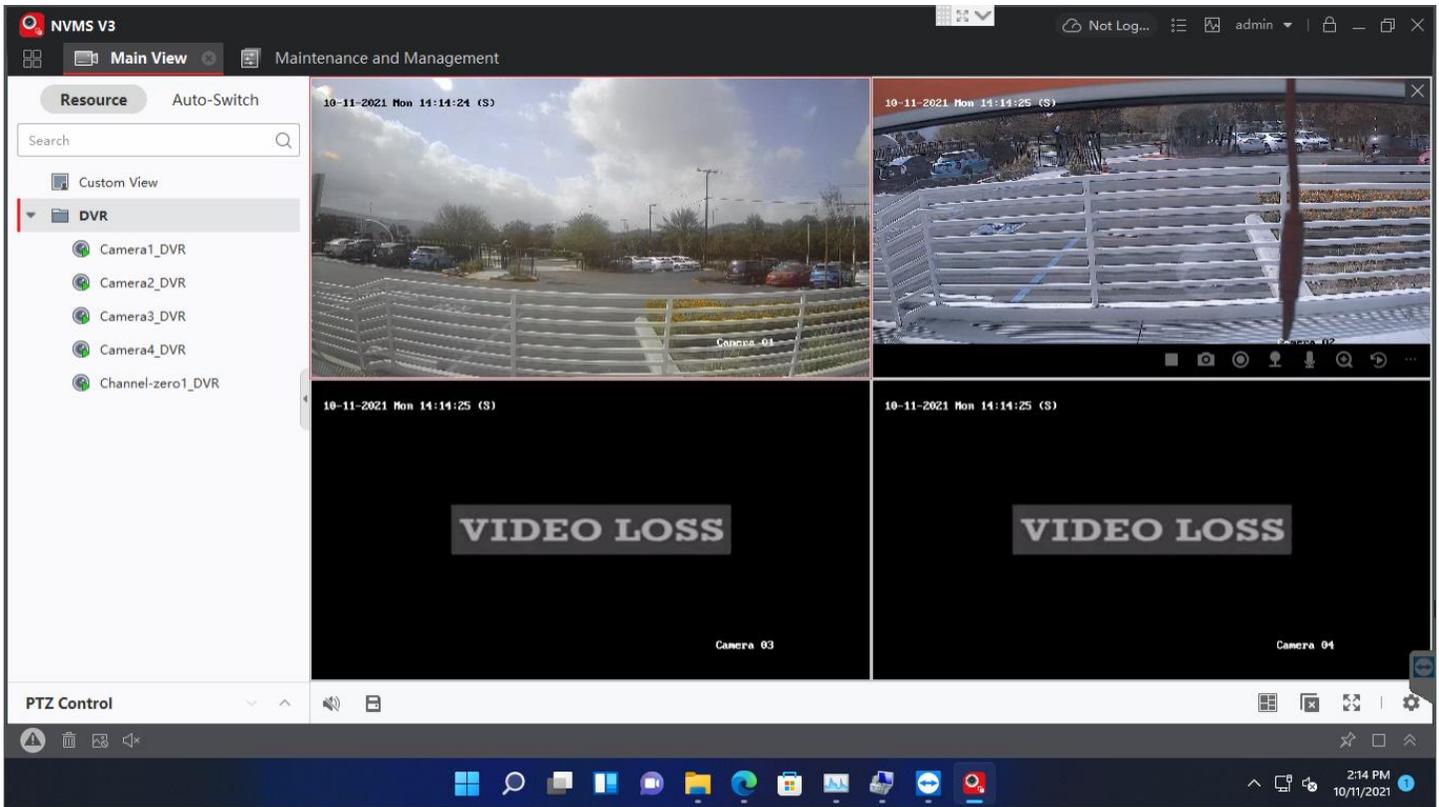

NVMSv3 Remote Configuration

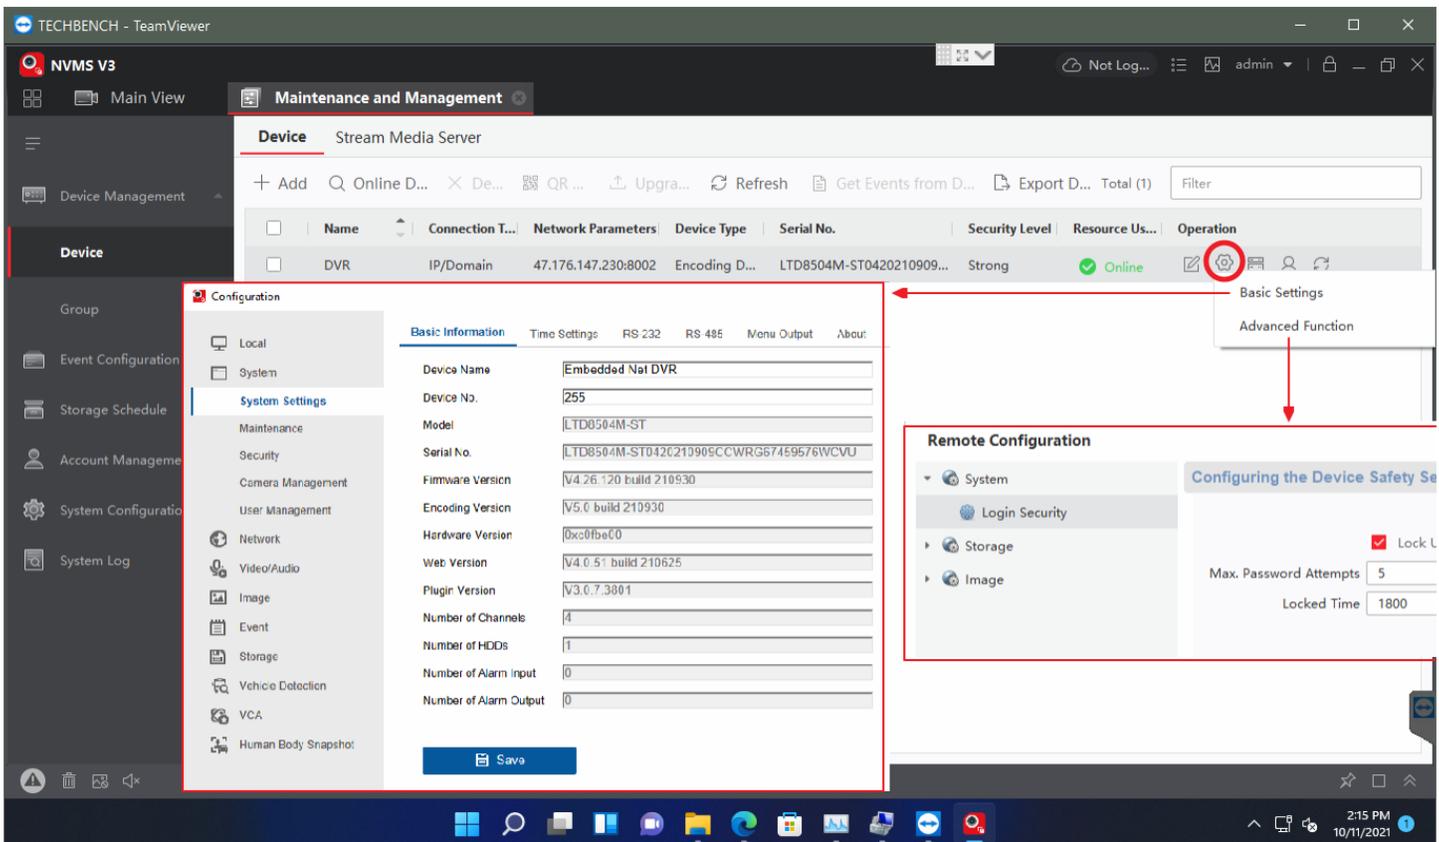

NVMSv3 Playback

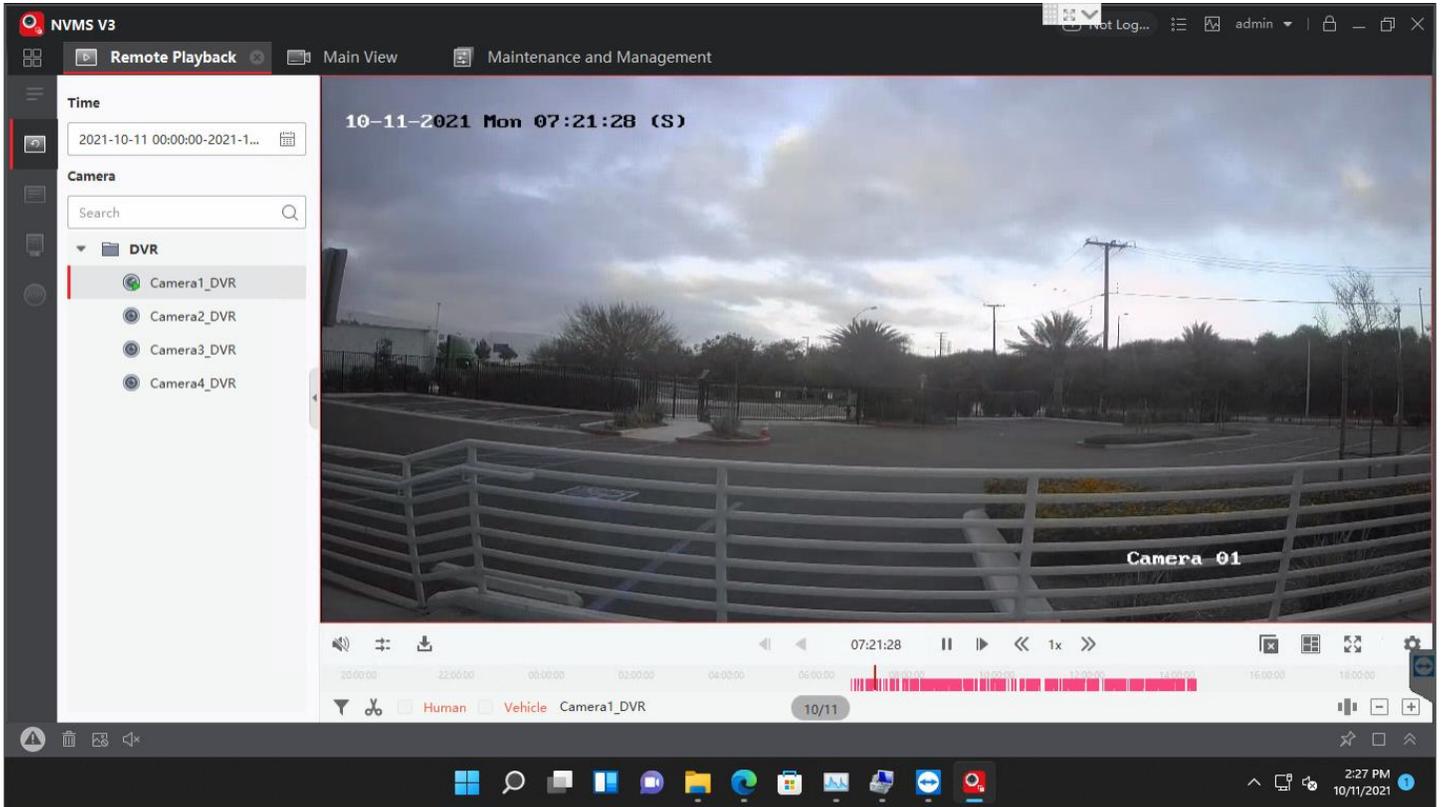

Other Reference Thumbnails: (Not important)



Image 031



Image 032




Image 033



Image 037



Image 038



Image 039



Image 043



Image 044



Image 045